
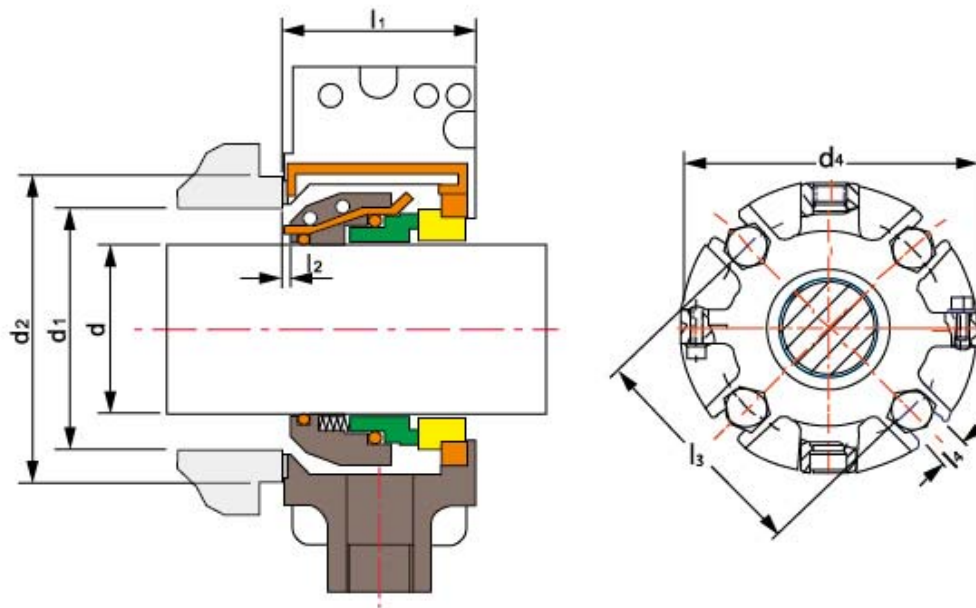


TSSP-C01 1.500-7.750(inches) Split-Cartridge Seal

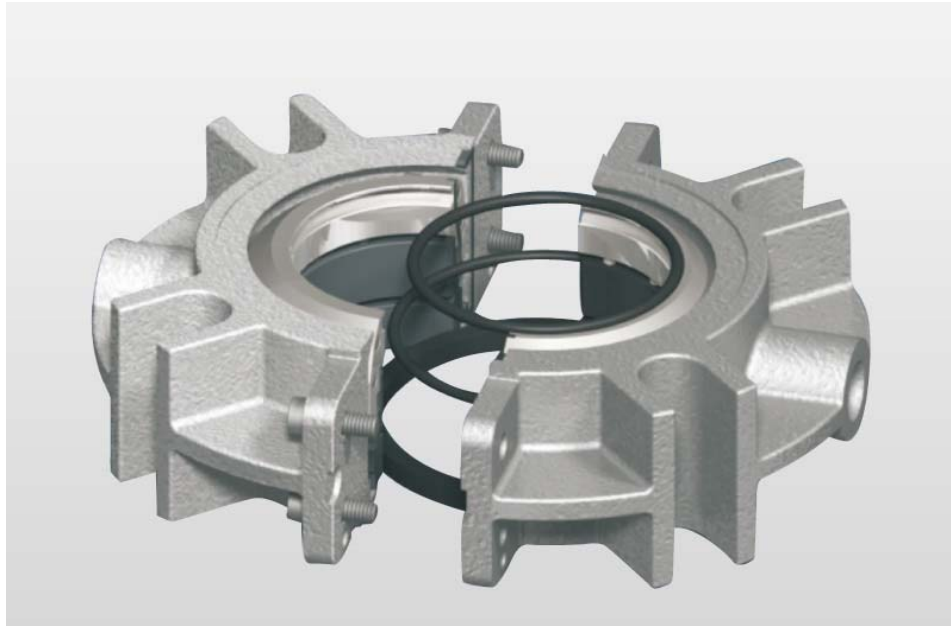

Operating Limits

Pressure: $\leq 1\text{MPa}$

Speed: $\leq 3600\text{RPM}$

Temperature: $+200^{\circ}\text{C}$

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541, +86-21-58353145, +86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Rotary Ring (Carbon/SiC/TC)
 Stationary Ring (Cermic/SiC/TC)
 Secondary Seal (VITON/NBR/EPDM)
 Spring & Other Parts (SUS304/SUS316)

d (inches)	l ₁	l ₃					d ₄	l ₂	d ₂	d ₁		l ₄
		3/8	2/1	5/8	3/4	7/8				No m	ma x	
1.500	2.0 0	3.3 8	3.5 0	\	\	\	5.00	1/1 6	2.75	2.2 5	2.5 0	0.5 6
1.625	2.0 0	3.5 0	3.6 3	\	\	\	5.00	1/1 6	2.88	2.3 8	2.6 3	0.5 6
1.688	2.0 0	3.6 3	3.7 5	\	\	\	5.00	1/1 6	3.00	2.5 0	2.7 5	0.5 6
1.750	2.0 0	3.6 3	3.7 5	\	\	\	5.00	1/1 6	3.00	2.5 0	2.7 5	0.5 6
1.875	2.0 0	3.7 5	3.8 8	\	\	\	5.00	1/1 6	3.13	2.6 3	2.8 8	0.5 6
1.937	2.0 0	3.9 4	4.0 6	\	\	\	5.00	1/1 6	3.25	2.7 5	3.0 0	0.5 6
2.000	2.0 0	3.9 4	4.0 6	\	\	\	5.00	1/1 6	3.25	2.7 5	3.0 0	0.5 6
2.125	2.0 0	4.0 6	4.1 9	4.32	\	\	6.00	1/1 6	3.38	2.8 8	3.1 3	0.6 9
2.250	2.0 0	4.1 9	4.3 2	4.44	\	\	6.25	1/1 6	3.50	3.0 0	3.2 5	0.6 9
2.375	2.0 0	4.5 0	4.6 2	4.75	\	\	6.50	1/1 6	3.63	3.1 3	3.3 8	0.6 9
2.437	2.0 0	4.5 7	4.7 0	4.82	\	\	6.50	1/1 6	4.00	3.2 5	3.7 5	0.6 9
2.500	2.0 0	4.5 7	4.7 0	4.82	\	\	6.50	1/1 6	4.00	3.2 5	3.7 5	0.6 9
2.750	2.5 0	\	5.5 6	5.68	\	\	7.75	1/8	4.75	3.7 5	4.2 5	0.6 9
3.000	2.5 0	\	5.8 2	5.95	\	\	8.00	1/8	5.00	4.0 0	4.5 0	0.7 2
3.250	2.5 0	\	6.1 3	6.25	\	\	8.25	1/8	5.25	4.2 5	4.7 5	0.7 2

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn

3.500	2.5 0	\	4.3 2	6.45	6.57	\	8.50	1/8	5.50	4.5 0	5.0 0	0.8 1
3.750	2.5 0	\	4.5 0	6.63	6.75	\	8.75	1/8	5.75	4.7 5	5.2 5	0.8 1
4.000	2.5 0	\	6.8 2	6.95	7.07	\	9.00	1/8	6.00	5.0 0	5.5 0	0.8 1
4.250	2.5 0	\	7.0 0	7.13	7.25	\	9.25	1/8	6.25	5.2 5	5.7 5	0.8 1
4.500	2.5 0	\	7.2 5	7.38	7.50	\	9.50	1/8	6.50	5.5 0	6.0 0	0.8 1
4.750	2.5 0	\	7.5 0	7.63	7.75	\	9.75	1/8	6.75	5.7 5	6.2 5	0.8 1
5.000	3.7 5	\	\	8.32	8.45	8.57	11.0 0	1/8	7.50	6.2 5	7.0 0	0.9 4
5.500	3.7 5	\	\	8.82	8.95	9.07	11.5 0	1/8	8.00	6.7 5	7.5 0	0.9 4
6.000	3.7 5	\	\	9.32	9.45	9.57	12.0 0	1/8	8.50	7.2 5	8.0 0	0.9 4
6.500	3.7 5	\	\	9.82	9.95	10.0 7	12.5 0	1/8	9.00	7.7 5	8.5 0	0.9 4
7.000	3.7 5	\	\	10.3 2	10.4 5	10.5 7	13.0 0	1/8	9.50	8.2 5	9.0 0	0.9 4
7.250	3.7 5	\	\	10.5 7	10.7 0	10.8 2	13.2 5	1/8	9.75	8.5 0	9.2 5	0.9 4
7.500	3.7 5	\	\	10.8 2	10.9 5	11.0 7	13.5 0	1/8	10.0 0	8.7 5	9.5 0	0.9 4
7.750	3.7 5	\	\	11.0 7	11.2 0	11.3 2	13.7 5	1/8	10.2 5	9.0 0	9.7 5	0.9 4

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn

d (inches)	l ₁	l ₃					d ₄	l ₂	d ₂	d ₁		l ₄
		3/8	2/1	5/8	3/4	7/8				Nom	max	
1.500	2.00	3.38	3.50	\	\	\	5.00	1/16	2.75	2.25	2.50	0.56
1.625	2.00	3.50	3.63	\	\	\	5.00	1/16	2.88	2.38	2.63	0.56
1.688	2.00	3.63	3.75	\	\	\	5.00	1/16	3.00	2.50	2.75	0.56
1.750	2.00	3.63	3.75	\	\	\	5.00	1/16	3.00	2.50	2.75	0.56
1.875	2.00	3.75	3.88	\	\	\	5.00	1/16	3.13	2.63	2.88	0.56
1.937	2.00	3.94	4.06	\	\	\	5.00	1/16	3.25	2.75	3.00	0.56
2.000	2.00	3.94	4.06	\	\	\	5.00	1/16	3.25	2.75	3.00	0.56
2.125	2.00	4.06	4.19	4.32	\	\	6.00	1/16	3.38	2.88	3.13	0.69
2.250	2.00	4.19	4.32	4.44	\	\	6.25	1/16	3.50	3.00	3.25	0.69
2.375	2.00	4.50	4.62	4.75	\	\	6.50	1/16	3.63	3.13	3.38	0.69
2.437	2.00	4.57	4.70	4.82	\	\	6.50	1/16	4.00	3.25	3.75	0.69
2.500	2.00	4.57	4.70	4.82	\	\	6.50	1/16	4.00	3.25	3.75	0.69
2.750	2.50	\	5.56	5.68	\	\	7.75	1/8	4.75	3.75	4.25	0.69
3.000	2.50	\	5.82	5.95	\	\	8.00	1/8	5.00	4.00	4.50	0.72
3.250	2.50	\	6.13	6.25	\	\	8.25	1/8	5.25	4.25	4.75	0.72
3.500	2.50	\	4.32	6.45	6.57	\	8.50	1/8	5.50	4.50	5.00	0.81
3.750	2.50	\	4.50	6.63	6.75	\	8.75	1/8	5.75	4.75	5.25	0.81
4.000	2.50	\	6.82	6.95	7.07	\	9.00	1/8	6.00	5.00	5.50	0.81
4.250	2.50	\	7.00	7.13	7.25	\	9.25	1/8	6.25	5.25	5.75	0.81
4.500	2.50	\	7.25	7.38	7.50	\	9.50	1/8	6.50	5.50	6.00	0.81
4.750	2.50	\	7.50	7.63	7.75	\	9.75	1/8	6.75	5.75	6.25	0.81
5.000	3.75	\	\	8.32	8.45	8.57	11.00	1/8	7.50	6.25	7.00	0.94
5.500	3.75	\	\	8.82	8.95	9.07	11.50	1/8	8.00	6.75	7.50	0.94
6.000	3.75	\	\	9.32	9.45	9.57	12.00	1/8	8.50	7.25	8.00	0.94
6.500	3.75	\	\	9.82	9.95	10.07	12.50	1/8	9.00	7.75	8.50	0.94
7.000	3.75	\	\	10.32	10.45	10.57	13.00	1/8	9.50	8.25	9.00	0.94
7.250	3.75	\	\	10.57	10.70	10.82	13.25	1/8	9.75	8.50	9.25	0.94
7.500	3.75	\	\	10.82	10.95	11.07	13.50	1/8	10.00	8.75	9.50	0.94
7.750	3.75	\	\	11.07	11.20	11.32	13.75	1/8	10.25	9.00	9.75	0.94

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn