


TS 58B /TS 59B 14mm-100mm Komponent Salmastra

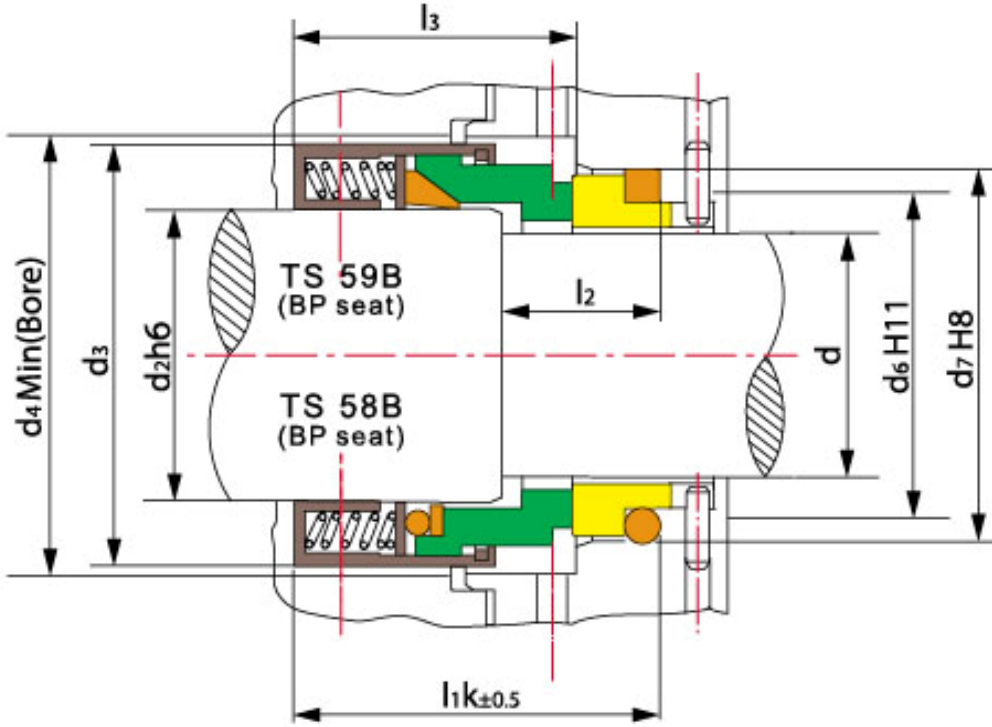

Tasarım Özellikleri:

- a. ISO3069 ve DIN24960 standartlarında
- b. Dengelenmiş mekanik salmastra
- c. TS 58B kauçuk O-halkadır ve TS 59B PTFE salmastra halkadır
- d. TS 58U, TS 59U malzemeler aynıdır

Shanghai Trisun Parts Manufacture Co.,Ltd.

Şangay Merkez Ofis:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Posta Kodu: 200122

Tel: +86-21-58355541, +86-21-58353145, +86-21-58353343

Fax: +86-21-58353141

E-mail: trisun24@trisunltd.com

Çalışma Sınırları

Basınç: $\leq 2.5\text{MPa}$

Hız: $\leq 25\text{m/s}$

Isı: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

boyut d(mm)	d ₂	d ₃	d ₄	l _{1k}	l ₂	l ₃	d ₆	d ₇
14	18	32	34	42.5	18	30.5	21	25
16	20	34	36	42.5	18	30.5	23	27
18	22	36	38	45	20	31.5	27	33
20	24	38	40	45	20	31.5	29	35
22	26	40	42	45	20	31.5	31	37
24	28	42	44	47.5	20	34.2	33	39
25	30	44	46	47.5	20	34.5	34	40
28	33	47	49	50	20	37.5	37	43
30	35	49	51	50	20	38	39	45
32	38	54	58	50	20	38	42	48
33	38	54	58	50	20	38	42	48
35	40	56	60	50	20	38	44	50
38	43	59	63	52.5	23	39.5	49	56
40	45	61	65	52.5	23	39.5	51	58
43	48	64	68	52.5	23	39.5	54	61
45	50	66	70	52.5	23	39.5	56	63
48	53	69	73	52.5	25	39.5	59	66
50	55	71	75	57.5	25	44	62	70
53	58	78	83	57.5	25	44	65	73
55	60	80	85	57.5	25	44	67	75
58	63	83	88	62.5	25	49	70	78
60	65	85	90	62.5	25	49	72	80
63	68	88	93	62.5	25	49	75	83
65	70	90	95	62.5	25	49	77	85
70	75	95	104	70	28	55.5	83	92
75	80	104	109	70	28	55.5	88	97
80	85	109	114	70	28	55	95	105
85	90	114	119	75	28	60	100	110
90	95	119	124	75	28	60	105	115
95	100	124	129	75	28	60	110	120
100	105	129	134	75	28	60	115	125

Shanghai Trisun Parts Manufacture Co.,Ltd.

Şangay Merkez Ofis:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Posta Kodu: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisun24@trisunltd.com