


TSSC-B05 25mm-70mm Kartuş Salmastra

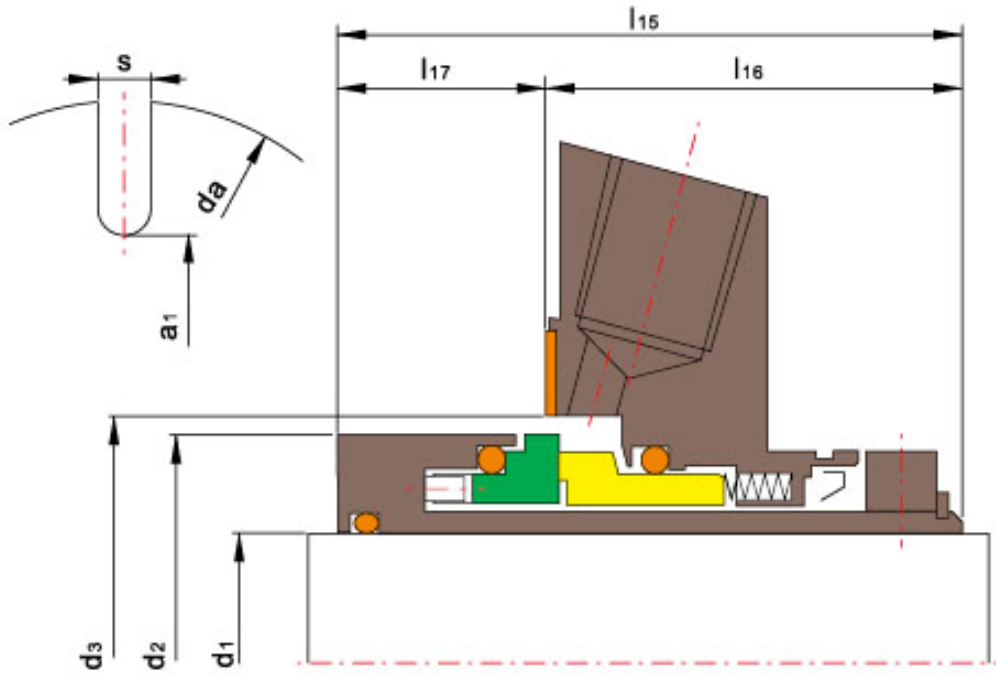

Özellikleri:

Çalışma Sınırları:

Basınç: $\leq 2.5\text{MPa}$

Hız: $\leq 16\text{m/s}$

Shanghai Trisun Parts Manufacture Co.,Ltd.

Şangay Merkez Ofis:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Posta Kodu: 200122

Tel: +86-21-58355541, +86-21-58353145, +86-21-58353343

Fax: +86-21-58353141

E-mail: trisun24@trisunltd.com

Isi: -40°C~220°C

- 1.Devir Halkası (SiC/TC)
- 2.Sabit Halka (SiC/TC/Karbon)
- 3.İkincil Salmastra (VITON/AFLAS/Kalrez)
4. Diğer Parçalar (C-276/Duplex/316)

d ₁	d ₂	d ₃		l ₁₅	l ₁₆	l ₁₇	a1	da	s
(mm)		min	max						
25.0	43.0	44.0	51.5	79.5	53.4	26.1	62.0	105.0	13.2
28.0	46.0	47.0	52	79.5	53.4	26.1	62.0	105.0	13.2
30.0	48.0	49.0	56	79.5	53.4	26.1	65.0	105.0	13.2
32.0	49.8	51.0	57	79.5	53.4	26.1	67.0	108.0	13.2
33.0	49.8	51.0	57	79.5	53.4	26.1	67.0	108.0	13.2
35.0	53.0	54.0	61.5	79.5	53.4	26.1	70.0	113.0	13.2
38.0	56.0	57.0	66	79.5	53.4	26.1	75.0	123.0	13.2
40.0	58.0	59.0	68	79.5	53.4	26.1	75.0	123.0	14.2
42.0	60.5	61.5	69.5	79.5	53.4	26.1	80.0	133.0	14.2
43.0	60.5	61.5	70.5	79.5	53.4	26.1	80.0	133.0	14.2
45.0	62.5	64.0	73	79.5	53.4	26.1	81.0	138.0	14.2
48.0	65.6	67.0	75	79.5	53.4	26.1	84.0	138.0	14.2
50.0	68.0	69.0	78	79.5	53.4	26.1	87.0	148.0	14.2
53.0	72.0	73.0	87	79.5	53.4	26.1	97.0	148.0	18.0
55.0	73.0	74.0	83	79.5	53.4	26.1	90.0	148.0	18.0
60.0	78.0	79.0	91	79.5	53.4	26.1	102.0	157.0	18.0
65.0	84.8	85.7	98.5	79.5	53.4	26.1	109.0	163.0	18.0
70.0	93.0	95.0	108	79.5	53.4	26.1	118.0	178.0	18.0

Shanghai Trisun Parts Manufacture Co.,Ltd.

Şangay Merkez Ofis:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Posta Kodu: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisun24@trisunltd.com